


# Assignment: Blink a led

## Goal


Check that your local environment is working properly.

## Step 1

Create this schematic:

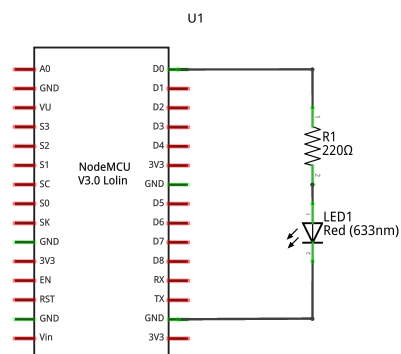

fritzing

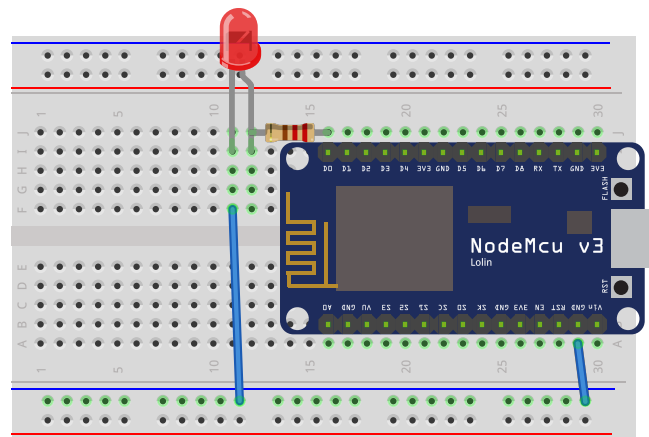

fritzing

The colors on the wires used does not matter. The resistors orientation is not important, but the LED's orientation is important.

## Step 2

Implement `setup()` and `loop()`. In `setup()` configure the LED pin and blink the LED in `loop()`.

Use these functions:

```
Serial.begin(115200);  
Serial.println(string);  
  
pinMode(pin, mode);  
digitalWrite(pin, state); // HIGH or LOW  
delay();
```

## Tips

- It is useful to print a startup message just to see when the application has started.